




Development of real time framework for parallel streaming data processing


Giil Kwon, Jaesic Hong
Control Team, National Fusion Research Institute
giilkwon@nfri.re.kr

Development of real time framework for parallel streaming data processing

- ☐ Real Time framework for Parallel streaming data Processing framework (RT-ParaPro)
 - This framework used to develop programs that simultaneously process strea ming data transmitted over a real-time network and send data over a network and archive them in real time.
 - This framework consists of pairs of thread and buffer which implements paral lel producer/consumer design pattern(C++).






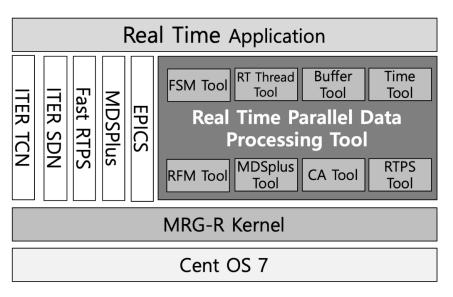

Architecture

Development of real time framework for parallel streaming data processing

- Performance test & use case
 - The period of the thread has a jitter of about 8usec not only in the low control cycle rate (1kHz) but also in the control cycle rate of 100kHz.
 - By using this framework, KSTAR developed two real time data processing application which need to have microsecond(μsec) order latency.
 - L/H Transition Detection System.(1kHz)
 - RFM data archiving System.(2kHz)

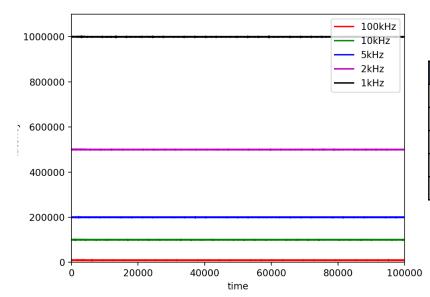

Thread Period		Mean(nsec)	Std(nsec)	Max - Min(nsec)
1kHz	1000000 nsec	999999.9996	176.9456	8369.0000
2KHz	500000 nsec	499999.9994	171.8813	6654.0000
5KHz	200000 nsec	199999.9994	169.1178	8528.0000
10KHz	100000 nsec	99999.9997	171.5877	7620.0000
100KHz	10000 nsec	9999.9995	164.9920	7325.0000

thread period

Performance test result



ID 458: Development of real time framework for parallel streaming data processing

Thank you for attention

If you have interested, please come to see my poster.

Development of real time framework for parallel streaming data processing

Giil Kwon, Jaesic Hong Control Team, National Fusion Research Institute giilkwon@nfri.re.kr

ABSTRACT

- Real Time framework for Parallel streaming data Processing framework (RT-ParaPro) is a framework used to develop programs that simultaneously process streaming data transmitted over a real-time network and send data over a network and archive them in real time.
- LHML, which determines whether plasma is L-mode or H-mode in real time by using machine learning, and RFM Archiving system, which stores various RFM channel data to Mdsplus, has been developed and operated in KSTAR.
- •The period of the thread in the RT-ParaPro has a jitter of about 176 nsec not only in the low control cycle rate (1kHz) but also in the control cycle rate of 100kHz.

VCKCBUTINE

- Most real-time frameworks (such as ITER RTF, MARTe) were developed with real-time control in mind, not real-time parallel streaming data processing for real time network.
- Most stream processing framework (Such as Spark Streaming, Flink, Storm) support millisecond(msec) order latency.
- ulletRT-ParaPro is specialized in the parallel data processing, archiving and transmission of data over a real-time network and support microsecond(μsec) order latency.

HALLENGES / METHODS / IMPLEMENTATION

Challenges


In KSTAR, 50 real time system connected to real time network(such as SDN, RFM) to process data in real time.


- These nodes process the data transmitted in multiple data channels in parallel.
- In KSTAR, the system with the highest number of channels must simultaneously process streaming data from 158 different channels in parallel in 2 kHz period.

Methods/Implementation

This framework consists of pairs of thread and buffer which implements parallel producer/consumer design pattern(C++).

- Each thread is able to set the attributes needed to have realtime properties (affinity, period, etc) by using RT-ParaPro.
- Control thread controls each thread in accordance with user command or shot sequence.





(Left) Architecture of RT-ParaPro framework, (Right) FSM of RT-ParaPro

- Event are implemented by using atomic operation.(An event listener thread is used to notify other threads of an event.)
- Control thread also manages life cycle of each threads by using control Finite State Machine (FSM).
- Each threads synchronized with control thread and control thread can synchronized with KSTAR system by using ITER TCN

OUTCOME

Applications

By using RT-ParaPro, 2 applications are developed in KSTAR

- LHML: this application determines whether plasma is L-mode or H-mode in real time by using machine learning(LSTM).(RT threads running at 1kHz, LSTM takes 56 µsec)
- RFM Archiving system: this application stores 158 RFM channel data to MDSplus, has been developed and operated in KSTAR. (RT threads running at 1kHz)

Performance Test


To evaluate the real time performance of this framework, we tested the consistency of thread period by varying the period of the thread (1kHz,2kHz,5kHz,10kHz,100kHz).

- The test shows that the thread control period is consistent.
- The period of the thread has a jitter of about 176 nsec not only in the low control cycle rate (1kHz) but also in the control cycle rate of 100kHz.

Table of consistency of real time thread period

Thread Period		Mean(nsec)	Std(nsec)	Max - Min(nsec)		
1kHz	1000000 nsec	999999.9996	176.9456	8369.0000		
2KHz	500000 nsec	499999.9994	171.8813	6654.0000		
5KHz	200000 nsec	199999.9994	169.1178	8528.0000		
10KHz	100000 nsec	99999.9997	171.5877	7620.0000		
100KHz	10000 nsec	9999.9995	164.9920	7325.0000		
(Laft) Consistency of DT through paried at various through fragues.						

(Right) Small latency spike(around 3000 nsec) was presented every 100 counts.



- In this paper, we present a Real Time framework for Parallel streaming data
- This framework is is specialized in the parallel data processing, archiving and transmission of data over a real-time network By using this framework, KSTAR developed two real time data processing application which need to have microsecond/usec) order latency.
- · Periodical latency spike problems will be solved
- GPGPU processing module and real-time image data processing module is under development.

ACKNOWLEDGEMENTS / REFERENCES

KWON, Giil, et al. Development of a real-time data archive system for a KSTAR real-time network. Fusion Engineering and Design, 2018, 127: 202-206.

