

Impact of opacity in determining the pedestal density structure on DIII-D and C-Mod

Tuesday 11 May 2021 12:10 (20 minutes)

Experiments on DIII-D and C-Mod show that high neutral opacity is compatible with a steep density gradient at the plasma edge [1,2]. Future reactors, including ITER, will operate at high neutral opacity, which will strongly limit direct fueling of the pedestal structure inside the Last Closed Flux Surface (LCFS) through ionization from edge sources in comparison with current existing experimental devices. At the highest opacities, the electron density pedestal structure is stiff and is not degraded by increases in fueling and Scrape-Off Layer (SOL) density. These experiments directly question integrated modeling predictions for ITER that show high opacity is incompatible with a steep pedestal density gradient inside the LCFS when particle transport is considered purely diffusive [3].

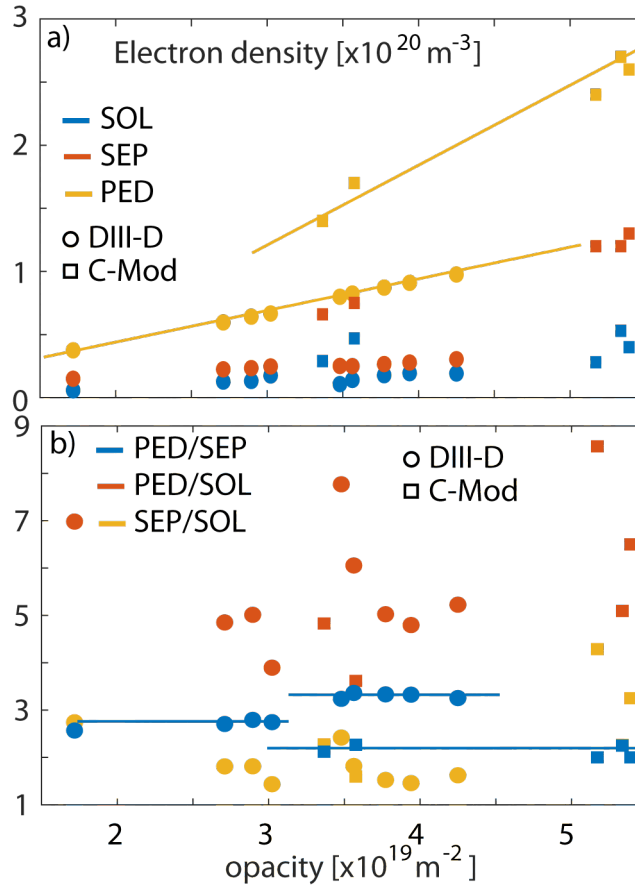


Figure 1: a) Change in electron density as a function of opacity on DIII-D (circle) and C-Mod (square) at top of the pedestal (yellow), separatrix (red), sol (blue). b) Change in density ratio as a function of opacity for neped/nesep (blue), neped/nesol (red) and nesep/nesol (yellow). The dashed lines help guide the eye.

High neutral opacity means that neutrals will ionize predominately inside the SOL, limiting the impact of edge fueling and peaked density profiles, under the assumption of purely diffusive particle transport. To test whether limited edge fueling in high neutral opacity regimes results in the collapse of the pedestal density profile, as predicted by simulations for ITER [3], we conduct a set of experiments on DIII-D and C-Mod in which we increase the neutral opacity. In our experiment we obtained opacity values that are only a factor 2 lower than those on ITER, while current day machines operate typically at opacity values that are about a factor 10 lower than those expected on ITER. Opacity can be approximated using values of the electron

density and the minor machine radius, $n \times a$. The experiments on DIII-D and C-Mod ranging in opacity range from $1.5 \times 10^{19} \text{ m}^{-2}$ to $5.5 \times 10^{19} \text{ m}^{-2}$ by operating at various plasma currents as well as adding an additional gas puff. Within this span of opacities, both DIII-D and C-Mod have robust density pedestal structures and increases in fueling and opacity did not affect the maximum density gradient on either machine. The $\max(1/L_{ne})$ on DIII-D remained close $\sim 8 \times 10^{21} \text{ m}^{-4}$ in absolute value for a fixed IP when the opacity was raised using gas fueling. This is also reflected in the fact that ne_{ped}/ne_{sep} remains constant for DIII-D as well as C-Mod over a wide range of opacities, see figure 1b). Thus, suggesting that changes in neutral penetration has little effect upon the pedestal density structure.

Using the filterscope measurements of D_α light at the mid plane inside the LCFS as well as in the SOL, we observe that with increasing opacity, there is a decrease in the neutral density especially inside the pedestal structure on DIII-D. Even though direct fueling through ionization of edge neutrals sharply decreases in the pedestal structure, the pedestal density still increases with increasing opacity, see figure 1a). This agrees with SOLPS-ITER modeling of these DIII-D discharges, which also shows a decrease in neutral density, not just at the midplane, when the neutral opacity increases in these experiments.

While opacity does not exclude a robust pedestal density structure, it does reduce our ability to fuel the core plasma using gas puffing. With increasing opacity, the increase in the pedestal density as a function of the additional gas fueling becomes smaller. This observation is again counter to the integrated predictive ITER H-mode simulations, which indicated that there was no saturation observed in the pedestal or separatrix density with increasing gas fueling. These models rely on fixed transport coefficients in the SOL and use a Bohm/GyroBohm approximation for the transport on closed flux surfaces. The increase in fueling in these simulations increases the SOL and separatrix density and the choice of the transport model for the core results in this increase propagating up to the pedestal density.

In DIII-D at the highest fueling levels, when the outer strike point detaches, we observe a saturation in the SOL density increase due to the formation of a density shoulder. A density shoulder is associated with a strong change in radial transport, which cannot be captured by these integrated models or SOLPS-ITER self-consistently [4]. The strong increase in radial outward transport associated with the formation of a density shoulder effectively impacts the ability to increase the separatrix density. As such, fueling an opaque plasma using a gas puff will be very inefficient or even completely ineffective. It does however not result in the collapse of the steep pedestal density.

To complicate transport models even further, for the first time, an up-down asymmetry in the electron density inside the LCFS was observed in DIII-D H-mode plasmas. The electron density was higher on the LFS close to the X-point, when compared to measurements taken on the LFS close to the crown of the plasma inside the LCFS. This asymmetry has been predicted by neoclassical models [5]. These results are different from prior research where a high electron density region in the HFS SOL region close to the X-point is observed in AUG H-mode plasmas [6].

This work was supported in part by the US Department of Energy under DE-FC02-04ER54698, DE-AC02-09CH11466, DE-SC0014264, DE-SC0019302, DE-SC0007880

[1] S. Mordijck et al. Nucl. Fus. (2020) submitted to Nuclear Fusion

[2] J.W. Hughes et al. Nucl. Fus. 58 (2018) 112003

[3] M. Romanelli et al. Nucl. Fus. 55 (2015) 093008

[4] D. Carralero et al. Nucl. Fus. 57 (2017) 056044

[5] R.M. Churchill et al. Nucl. Fus. 53 (2013) 122002.

[6] F. Reimold et al. NME 12 (2017)193–199

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

Affiliation

William & Mary

Country or International Organization

United States

Authors: MORDIJCK, Saskia (College of William and Mary); HUGHES, Jerry (MIT PSFC); Mr REKSOATMODJO, Richard (William & Mary)

Presenter: MORDIJCK, Saskia (College of William and Mary)

Session Classification: P1 Posters 1

Track Classification: Magnetic Fusion Experiments